



G2 - 10 MODEL

MOBILE CONCRETE MIXER



CUSTOMER-FOCUSED INNOVATION

WHY OWN A HOLCOMBE VOLUMETRIC MIXER

- Produce fresh concrete on demand, on site
- Deliver waste-free short loads to the yard
- Produce specialty concrete mixes as needed
- Control the quality and supply of your ready mix concrete needs

HOLCOMBE MIXER APPLICATIONS

GENERAL CONTRACTOR:

Make spec concrete, from 2,500 PSI to 5,000 PSI, at 50% off ready mix prices.

POOL BUILDERS:

Make wet shotcrete of dry gunite mixes to take control of your pool construction projects.

OIL FIELD SERVICES:

Make cement slurry or concrete for plugging, casing, and rat hole services.

HIGHWAY & ROAD REPAIR SERVICES:

Produce rapid-setting concrete for time-sensitive road and highway repairs.

UTILITIES CONTRACTORS & MUNICIPALITIES:

Make flowable fill for low cost excavatable backfill for water, sewer, and excavating projects.

G2 - 10

SPECIFICATIONS

THE HOLCOMBE ADVANTAGE

Intellicrete™ Technology takes smart to the next level. Intellicrete simplifies volumetric mixer operations. It ensures admixtures and additives are consistently in sync with the concrete production rate. The concrete quality is unlike anything you've ever seen before.

Intellicrete™ Control System - keeps admixtures and additives consistently in sync with the concrete production rate yielding unparalleled concrete quality. Equipped with onscreen calibration and mix design programming in addition to a pre-pour checklist to verify mix accuracy and promote safety.

WaterSmart™ Moisture Control System - the first of its kind to control concrete slump with dynamic calibration flow control with an electronic proportional water valve.

InsightFlow™ Cement Feed - precision cement feed control optimizes aggregate gate positioning to provide reliable and consistent aggregate brick strike off and dispensing.

Load Sensing Variable Displacement Hydraulic System reduces system temperature and extends the life of components.


Patented Modular Cassette Conveyor System - Easily removable modular conveyor cassette with engineered roller chain enables belt changes in under four hours.

STANDARD FEATURES

- PLC Touchscreen 7" Color
- CAN Bus Joystick Auger and Chute Controls
- CAN Bus Button and Redundant On Screen Control Of PTO, RPM, and All Mix **Functions**
- Wireless Remote Control
- Low and 2 High-Flow Admixture Systems
- Gate Verification Sensor System
- Electric Roll Tarp for Aggregates
- Electric Vibrators on Aggregate and Cement Bins
- 12" Mixing Auger with Ni-Hard Wear Blades
- Hydraulic Swing of Mixing Auger and **Hydraulic Chute Control**
- Variable Cement Control for Flowable Fill **Applications**
- LED Work Lights

MODEL	HM10H G2 (Gen 2.0)
Production rate-3000 PSI mix (YD/HR, M3/HR)	60 (46)
Water Tank (GAL, L)	530 (2006)
Cement BIN (FT3, M3)	110 (2.8)
Aggregate Bin (FT3, M3)	330 (9.4)
Aggregate Load Height Avg. (IN, M)	127(3.2)
Cement Load Height (IN, M)	137 (3.5)
Auger Diameter (IN, CM)	12 (31)
Auger Swing Angle (DEG)	170
Auger Reach - 2 Chutes (FT, M)	17 (5.2)
Auger Discharge Height (IN, M)	50 (1.3)
Body Length with Auger (IN, M)	300 (7.6)
Body Width (IN, M)	90 (2.29)

- Fiber and Color Dispensers
- 360° Swivel Chute
- Pneumatic Cement Fill Bin with **Venting System**
- Thermal Transfer Hot Water System

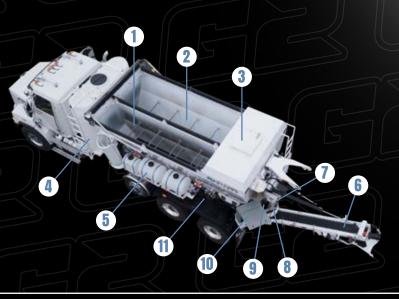

- **1. Sand Bin**
- 2. Rock Bin
- 3. Cement Bin
- 4. Water Tank
- **5. Admixture System**
- 6. Mixing Auger
- 7. Discharge Bowl
- 8. Cement Metering
- 9. Conveyor Belt
- **10. Control Panel & PLC** Display
- 11. Rock & Sand Gates



HM10H MODEL

MOBILE CONCRETE MIXER



CUSTOMER-FOCUSED INNOVATION

WHY OWN A HOLCOMBE VOLUMETRIC MIXER

- Produce fresh concrete on demand, on site
- Deliver waste-free short loads to the yard
- Produce specialty concrete mixes as needed
- Control the quality and supply of your ready mix concrete needs

HOLCOMBE MIXER APPLICATIONS

GENERAL CONTRACTOR:

Make spec concrete, from 2,500 PSI to 5,000 PSI, at 50% off ready mix prices.

POOL BUILDERS:

Make wet shotcrete of dry gunite mixes to take control of your pool construction projects.

OIL FIELD SERVICES:

Make cement slurry or concrete for plugging, casing, and rat hole services.

HIGHWAY & ROAD REPAIR SERVICES:

Produce rapid-setting concrete for time-sensitive road and highway repairs.

UTILITIES CONTRACTORS & MUNICIPALITIES:

Make flowable fill for low cost excavatable backfill for water, sewer, and excavating projects.



MIX HARD MIX SMART CRUSH IT

HM10H

SPECIFICATIONS

THE HOLCOMBE ADVANTAGE

Patented Removable Cassette Conveyor

Friction-less Conveyor System reduces fuel consumption per yard of concrete produced

Load Sensing Variable Displacement Hydraulic System reduces system temperature and extends life of components

No-lubrication Conveyor Chain reduces chain maintenance and eliminates lubrication oil leaks


Variable Cement Control System provides for quick changes between mix designs

MODEL	НМ10Н
Production rate-3000 PSI mix (YD/HR, M3/HR)	60 (46)
Water Tank (GAL, L)	530 (2006)
Cement BIN (FT3, M3)	110 (3.1)
Aggregate Bin (FT3, M3)	330 (9.4)
Aggregate Load Height Avg. (IN, M)	125 (3.1)
Cement Load Height (IN, M)	137 (3.5)
Auger Diameter (IN, CM)	12 (31)
Auger Swing Angle (DEG)	170
Auger Reach - 2 Chutes (FT, M)	17 (5.2)
Auger Discharge Height (IN, M)	50 (1.3)
Body Length with Auger (IN, M)	276 (7)
Body Width (IN, M)	90 (2.29)

STANDARD FEATURES

- PLC Display and Ticket Printer
- Wireless Remote Control
- One (1) Low and Two (2) High-flow **Admixture Systems**
- Electric Vibrators on Aggregate and **Cement Bins**
- 12" Mixing Auger with Ni-Hard wear
- Hydraulic Swing of mixing auger and hydraulic chute control
- Variable Cement Control for flowable fill applications
- LED Work Lights
- Gate Sensors
- Electric Roll Tarp for Aggregate Bin

- Fiber and Color Dispensers
- 360° Swivel Chute
- Pneumatic Cement Fill Bin
- Thermal Transfer Hot Water System

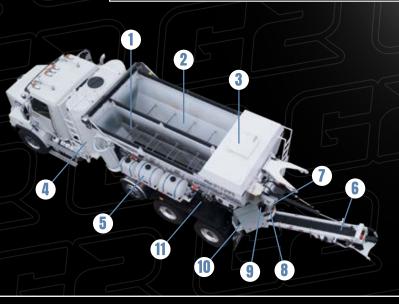

- **1. Sand Bin**
- 2. Rock Bin
- 3. Cement Bin
- 4. Water Tank
- **5.** Admixture System
- 6. Mixing Auger
- 7. Discharge Bowl
- 8. Cement Metering
- 9. Conveyor Belt
- **10. Control Panel & PLC Display**
- 11. Rock & Sand Gates



HM10HT MODEL

MOBILE CONCRETE MIXER

CUSTOMER-FOCUSED INNOVATION

WHY OWN A HOLCOMBE VOLUMETRIC MIXER

- Produce fresh concrete on demand, on site
- Deliver waste-free short loads to the yard
- Produce specialty concrete mixes as needed
- Control the quality and supply of your ready mix concrete needs

HOLCOMBE MIXER APPLICATIONS

GENERAL CONTRACTOR:

Make spec concrete, from 2,500 PSI to 5,000 PSI, at 50% off ready mix prices.

POOL BUILDERS:

Make wet shotcrete of dry gunite mixes to take control of your pool construction projects.

OIL FIELD SERVICES:

Make cement slurry or concrete for plugging, casing, and rat hole services.

HIGHWAY & ROAD REPAIR SERVICES:

Produce rapid-setting concrete for time-sensitive road and highway repairs.

UTILITIES CONTRACTORS & MUNICIPALITIES:

Make flowable fill for low cost excavatable backfill for water, sewer, and excavating projects.



MIX HARD MIX SMART CRUSH IT

HM10HT

SPECIFICATIONS

THE HOLCOMBE ADVANTAGE

Patented Removable Cassette Conveyor

Friction-less Conveyor System reduces fuel consumption per yard of concrete produced

Load Sensing Variable Displacement Hydraulic System reduces system temperature and extends life of components

No-lubrication Conveyor Chain reduces chain maintenance and eliminates lubrication oil leaks


Variable Cement Control System provides for quick changes between mix designs

MODEL	HM10HT
Production rate-3000 PSI mix (YD/HR, M3/HR)	60 (46)
Water Tank (GAL, L)	950 (3596)
Cement BIN (FT3, M3)	110 (3.1)
Aggregate Bin (FT3, M3)	330 (9.4)
Aggregate Load Height Avg. (IN, M)	125 (3.1)
Cement Load Height (IN, M)	137 (3.5)
Auger Diameter (IN, CM)	12 (31)
Auger Swing Angle (DEG)	170
Auger Reach - 2 Chutes (FT, M)	17 (5.2)
Auger Discharge Height (IN, M)	50 (1.3)
Body Length with Auger (IN, M)	286 (7.3)
Body Width (IN, M)	90 (2.29)

STANDARD FEATURES

- PLC Display and Ticket Printer
- Wireless Remote with in Cab Control
- One (1) Low and Two (2) High-flow **Admixture Systems**
- Electric Vibrators on Aggregate and **Cement Bins**
- 12" Mixing Auger with Ni-Hard wear
- Hydraulic Swing of mixing auger and hydraulic chute control
- Variable Cement Control for flowable fill applications
- LED Work Lights
- Gate Sensors
- Electric Roll Tarp for Aggregate Bin100 HP liquid cooled diesel Engine to **Power Mixer**

- Fiber and Color Dispensers
- 360° Swivel Chute
- Pneumatic Cement Fill Bin

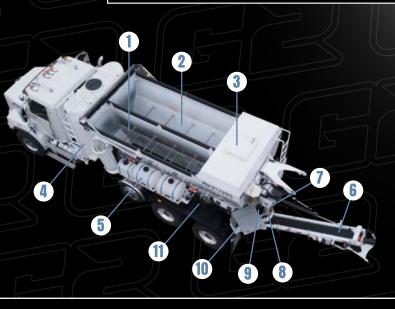

- **1. Sand Bin**
- 2. Rock Bin
- 3. Cement Bin
- 4. Water Tank
- **5.** Admixture System
- 6. Mixing Auger
- 7. Discharge Bowl
- **8.** Cement Metering
- 9. Conveyor Belt
- **10. Control Panel & PLC Display**
- 11. Rock & Sand Gates





HM12H MODEL

MOBILE CONCRETE MIXER



CUSTOMER-FOCUSED INNOVATION

WHY OWN A HOLCOMBE VOLUMETRIC MIXER

- Produce fresh concrete on demand, on site
- Deliver waste-free short loads to the yard
- Produce specialty concrete mixes as needed
- Control the quality and supply of your ready mix concrete needs

HOLCOMBE MIXER APPLICATIONS

GENERAL CONTRACTOR:

Make spec concrete, from 2,500 PSI to 5,000 PSI, at 50% off ready mix prices.

POOL BUILDERS:

Make wet shotcrete of dry gunite mixes to take control of your pool construction projects.

OIL FIELD SERVICES:

Make cement slurry or concrete for plugging, casing, and rat hole services.

HIGHWAY & ROAD REPAIR SERVICES:

Produce rapid-setting concrete for time-sensitive road and highway repairs.

UTILITIES CONTRACTORS & MUNICIPALITIES:

Make flowable fill for low cost excavatable backfill for water, sewer, and excavating projects.



MIX HARD MIX SMART CRUSH ITT

HM12H

SPECIFICATIONS

THE HOLCOMBE ADVANTAGE

Patented Removable Cassette Conveyor

Friction-less Conveyor System reduces fuel consumption per yard of concrete produced

Load Sensing Variable Displacement Hydraulic System reduces system temperature and extends life of components

No-lubrication Conveyor Chain reduces chain maintenance and eliminates lubrication oil leaks


Variable Cement Control System provides for quick changes between mix designs

MODEL	HM12H
Production rate-3000 PSI mix (YD/HR, M3/HR)	60 (46)
Water Tank (GAL, L)	530 (2006)
Cement BIN (FT3, M3)	120 (3.1)
Aggregate Bin (FT3, M3)	411 (11.6)
Aggregate Load Height Avg. (IN, M)	125 (3.1)
Cement Load Height (IN, M)	137 (3.5)
Auger Diameter (IN, CM)	12 (31)
Auger Swing Angle (DEG)	170
Auger Reach - 2 Chutes (FT, M)	17 (5.2)
Auger Discharge Height (IN, M)	50 (1.3)
Body Length with Auger (IN, M)	300 (7.6)
Body Width (IN, M)	90 (2.29)

STANDARD FEATURES

- PLC Display and Ticket Printer
- Wireless Remote with in Cab Control
- One (1) Low and Two (2) High-flow **Admixture Systems**
- Electric Vibrators on Aggregate and **Cement Bins**
- 12" Mixing Auger with Ni-Hard wear
- Hydraulic Swing of mixing auger and hydraulic chute control
- Variable Cement Control for flowable fill applications
- LED Work Lights
- Gate Sensors
- Electric Roll Tarp for Aggregate Bin

- Fiber and Color Dispensers
- 360° Swivel Chute
- Pneumatic Cement Fill Bin
- Thermal Transfer Hot Water System

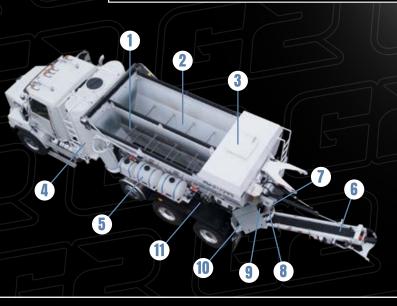

- **1. Sand Bin**
- 2. Rock Bin
- 3. Cement Bin
- 4. Water Tank
- **5.** Admixture System
- 6. Mixing Auger
- 7. Discharge Bowl
- 8. Cement Metering
- 9. Conveyor Belt
- **10. Control Panel & PLC Display**
- 11. Rock & Sand Gates



HM12HE MODEL

MOBILE CONCRETE MIXER



CUSTOMER-FOCUSED INNOVATION

WHY OWN A HOLCOMBE VOLUMETRIC MIXER

- Produce fresh concrete on demand, on site
- Deliver waste-free short loads to the yard
- Produce specialty concrete mixes as needed
- Control the quality and supply of your ready mix concrete needs

HOLCOMBE MIXER APPLICATIONS

GENERAL CONTRACTOR:

Make spec concrete, from 2,500 PSI to 5,000 PSI, at 50% off ready mix prices.

POOL BUILDERS:

Make wet shotcrete of dry gunite mixes to take control of your pool construction projects.

OIL FIELD SERVICES:

Make cement slurry or concrete for plugging, casing, and rat hole services.

HIGHWAY & ROAD REPAIR SERVICES:

Produce rapid-setting concrete for time-sensitive road and highway repairs.

UTILITIES CONTRACTORS & MUNICIPALITIES:

Make flowable fill for low cost excavatable backfill for water, sewer, and excavating projects.



MIX HARD MIX SMART CRUSH ITT

HM12HE

SPECIFICATIONS

THE HOLCOMBE ADVANTAGE

Patented Removable Cassette Conveyor

Friction-less Conveyor System reduces fuel consumption per yard of concrete produced

Load Sensing Variable Displacement Hydraulic System reduces system temperature and extends life of components

No-lubrication Conveyor Chain reduces chain maintenance and eliminates lubrication oil leaks


Variable Cement Control System provides for quick changes between mix designs

MODEL	HM12HE
Production rate-3000 PSI mix (YD/HR, M3/HR)	60 (46)
Water Tank (GAL, L)	530 (2006)
Cement BIN (FT3, M3)	120 (3.4)
Aggregate Bin (FT3, M3)	370 (10.5)
Aggregate Load Height Avg. (IN, M)	132 (3.4)
Cement Load Height (IN, M)	137 (3.5)
Auger Diameter (IN, CM)	12 (31)
Auger Swing Angle (DEG)	170
Auger Reach - 2 Chutes (FT, M)	17 (5.2)
Auger Discharge Height (IN, M)	50 (1.3)
Body Length with Auger (IN, M)	300 (7.6)
Body Width (IN, M)	90 (2.29)

STANDARD FEATURES

- PLC Display and Ticket Printer
- Wireless Remote with in Cab Control
- One (1) Low and Two (2) High-flow **Admixture Systems**
- Electric Vibrators on Aggregate and **Cement Bins**
- 12" Mixing Auger with Ni-Hard wear
- Hydraulic Swing of mixing auger and hydraulic chute control
- Variable Cement Control for flowable fill applications
- LED Work Lights
- Gate Sensors
- Electric Roll Tarp for Aggregate Bin

- Fiber and Color Dispensers
- 360° Swivel Chute
- Pneumatic Cement Fill Bin
- Fly Ash Dispenser
- Thermal Transfer Hot Water System

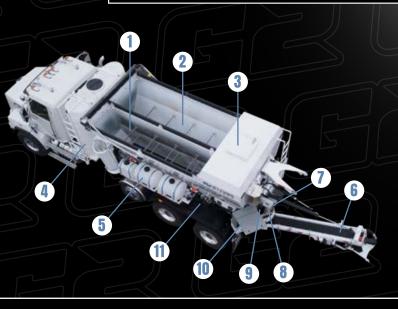

- **1. Sand Bin**
- 2. Rock Bin
- 3. Cement Bin
- 4. Water Tank
- **5.** Admixture System
- 6. Mixing Auger
- 7. Discharge Bowl
- 8. Cement Metering
- 9. Conveyor Belt
- **10. Control Panel & PLC Display**
- 11. Rock & Sand Gates